


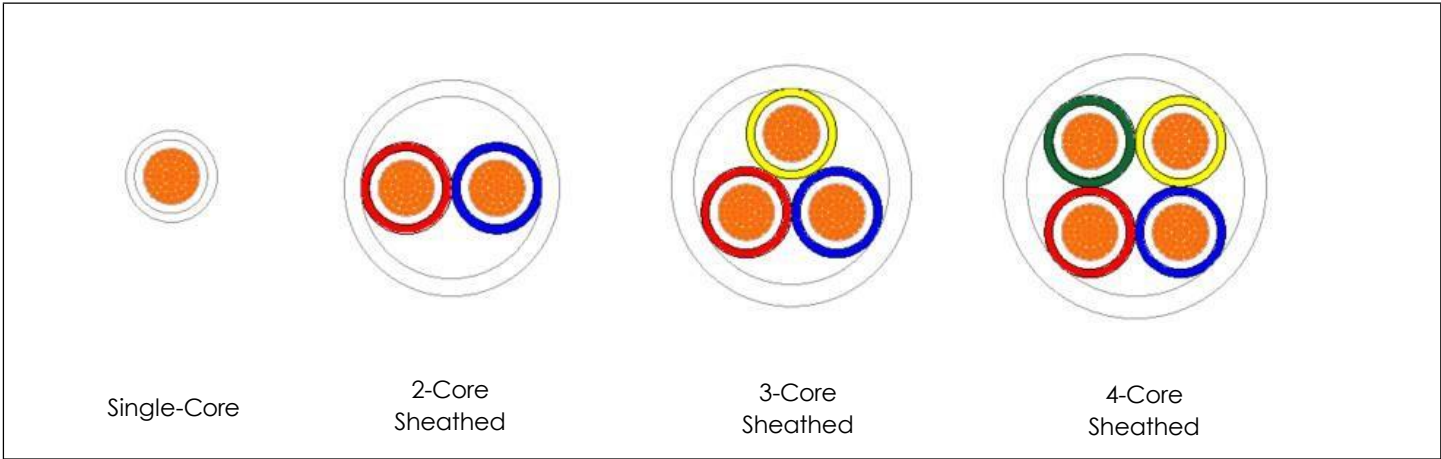

Construction	
Conductor:	Stranded Tin, Silver or Nickel Plated Conductors
Insulation:	Crosslinked ETFE. Single or Dual Layer
Sheath:	Crosslinked ETFE. White
Technical Data	
Temperature Rating:	Tin Plated - 135 °C Silver Plated - 150 °C Nickel Plated - 150 °C
Voltage Rating:	600 V AC

****Other configurations available upon request****

Cable, Type 1, Tin Plated Conductor, 135°C, without Screen or Jacket

Part Number	Size (AWG)	Single Core			
		Strand Size	Min Diameter mm	Max Diameter mm	Mass Max kg/km
SPC06961A***	22	19/0.15mm	0.98	1.08	3.98
SPC06962A***	20	19/0.20mm	1.19	1.35	6.54
SPC06963A***	18	19/0.25mm	1.44	1.59	9.81
SPC06964A***	16	19/0.30mm	1.56	1.82	13.27
SPC06965A***	14	37/0.25mm	1.93	2.29	19.57
SPC06966A***	12	37/0.32mm	2.37	2.74	29.73

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC06967A***	22	19/0.15mm	2.16	8.04
SPC06968A***	20	19/0.20mm	2.70	13.23
SPC06969A***	18	19/0.25mm	3.18	19.81
SPC06970A***	16	19/0.30mm	3.64	25.33
SPC06971A***	14	37/0.25mm	4.58	39.52
SPC06972A***	12	37/0.32mm	5.48	60.06

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC06973A***	22	19/0.15mm	2.33	12.05
SPC06974A***	20	19/0.20mm	2.92	19.84
SPC06975A***	18	19/0.25mm	3.43	29.72
SPC06976A***	16	19/0.30mm	3.93	38.00
SPC06977A***	14	37/0.25mm	4.95	59.29
SPC06978A***	12	37/0.32mm	5.92	90.09

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC06979A***	22	19/0.15mm	2.61	16.07
SPC06980A***	20	19/0.20mm	3.27	26.46
SPC06981A***	18	19/0.25mm	3.85	39.63
SPC06982A***	16	19/0.30mm	4.40	50.67
SPC06983A***	14	37/0.25mm	5.54	79.05
SPC06984A***	12	37/0.32mm	6.63	120.12

Cable, Type 1, Tin Plated Conductor, 135°C, without Screen, with Jacket

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC06985A***	26	19/0.10mm	2.04	5.34
SPC06986A***	24	19/0.12mm	2.13	6.80
SPC06987A***	22	19/0.15mm	2.49	9.66
SPC06988A***	20	19/0.20mm	2.98	15.32
SPC06989A***	18	19/0.25mm	3.49	21.96
SPC06990A***	16	19/0.30mm	3.98	28.51
SPC06991A***	14	37/0.25mm	4.54	41.20
SPC06992A***	12	37/0.32mm	5.47	61.37

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC06993A***	26	19/0.10mm	2.17	7.60
SPC06994A***	24	19/0.12mm	2.38	9.85
SPC06995A***	22	19/0.15mm	2.77	14.52
SPC06996A***	20	19/0.20mm	3.30	22.73
SPC06997A***	18	19/0.25mm	3.83	33.25
SPC06998A***	16	19/0.30mm	4.33	42.24
SPC06999A***	14	37/0.25mm	4.99	61.23
SPC07000A***	12	37/0.32mm	5.99	92.26

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07001A***	26	19/0.10mm	2.38	9.79
SPC07002A***	24	19/0.12mm	2.60	13.12
SPC07003A***	22	19/0.15mm	3.01	19.29
SPC07004A***	20	19/0.20mm	3.67	29.94
SPC07005A***	18	19/0.25mm	4.25	43.93
SPC07006A***	16	19/0.30mm	4.80	56.55
SPC07007A***	14	37/0.25mm	6.00	85.73
SPC07008A***	12	37/0.32mm	7.09	128.78

Cable, Type 1, Tin Plated Conductor, 135°C, with Screen and Jacket

Part Number	Size (AWG)	Single Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07009A***	26	19/0.10mm	1.58	6.05
SPC07010A***	24	19/0.12mm	1.69	7.02
SPC07011A***	22	19/0.15mm	1.87	8.95
SPC07012A***	20	19/0.20mm	2.11	12.64
SPC07013A***	18	19/0.25mm	2.37	16.51
SPC07014A***	16	19/0.30mm	2.61	21.12
SPC07015A***	14	37/0.25mm	2.90	27.68
SPC07016A***	12	37/0.32mm	3.39	39.25

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07017A***	26	19/0.10mm	2.41	10.43
SPC07018A***	24	19/0.12mm	2.62	12.53
SPC07019A***	22	19/0.15mm	2.98	16.50
SPC07020A***	20	19/0.20mm	3.50	23.35
SPC07021A***	18	19/0.25mm	4.02	31.62
SPC07022A***	16	19/0.30mm	4.50	39.12
SPC07023A***	14	37/0.25mm	5.09	52.76
SPC07024A***	12	37/0.32mm	6.04	76.51



Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07025A***	26	19/0.10mm	2.63	14.16
SPC07026A***	24	19/0.12mm	2.79	16.92
SPC07027A***	22	19/0.15mm	3.21	22.56
SPC07028A***	20	19/0.20mm	3.74	32.08
SPC07029A***	18	19/0.25mm	4.30	44.03
SPC07030A***	16	19/0.30mm	4.83	54.43
SPC07031A***	14	37/0.25mm	5.46	74.89
SPC07032A***	12	37/0.32mm	6.45	109.33



Cable, Type 1, Silver Plated Conductor, 150°C, without Screen and Jacket

Part Number	Size (AWG)	Single Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07041A***	26	19/0.10mm	0.82	1.88
SPC07042A***	24	19/0.12mm	0.91	2.57
SPC07043A***	22	19/0.15mm	1.08	3.98
SPC07044A***	20	19/0.20mm	1.35	6.54
SPC07045A***	18	19/0.25mm	1.59	9.81
SPC07046A***	16	19/0.30mm	1.82	13.27
SPC07047A***	14	37/0.25mm	2.29	19.57
SPC07048A***	12	37/0.32mm	2.74	30.35

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07049A***	26	19/0.10mm	1.64	3.83
SPC07050A***	24	19/0.12mm	1.82	5.20
SPC07051A***	22	19/0.15mm	2.16	8.04
SPC07052A***	20	19/0.20mm	2.70	13.23
SPC07053A***	18	19/0.25mm	3.18	19.81
SPC07054A***	16	19/0.30mm	3.64	25.33
SPC07055A***	14	37/0.25mm	4.58	39.52
SPC07056A***	12	37/0.32mm	5.48	61.61



Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07057A***	26	19/0.10mm	1.77	5.74
SPC07058A***	24	19/0.12mm	1.97	7.90
SPC07059A***	22	19/0.15mm	2.33	12.05
SPC07060A***	20	19/0.20mm	2.92	19.84
SPC07061A***	18	19/0.25mm	3.43	29.72
SPC07062A***	16	19/0.30mm	3.93	38.00
SPC07063A***	14	37/0.25mm	4.95	59.29
SPC07064A***	12	37/0.32mm	5.92	92.41

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07065A***	26	19/0.10mm	1.98	7.65
SPC07066A***	24	19/0.12mm	2.20	10.39
SPC07067A***	22	19/0.15mm	2.61	16.07
SPC07068A***	20	19/0.20mm	3.27	26.46
SPC07069A***	18	19/0.25mm	3.85	39.63
SPC07070A***	16	19/0.30mm	4.40	50.67
SPC07071A***	14	37/0.25mm	5.54	7905
SPC07072A***	12	37/0.32mm	6.63	123.22



Cable, Type 1, Silver Plated Conductor, 150°C, without Screen, with Jacket

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07073A***	26	19/0.10mm	2.04	5.34
SPC07074A***	24	19/0.12mm	2.22	6.80
SPC07075A***	22	19/0.15mm	2.56	10.14
SPC07076A***	20	19/0.20mm	3.10	15.78
SPC07077A***	18	19/0.25mm	3.58	22.81
SPC07078A***	16	19/0.30mm	4.04	28.51
SPC07079A***	14	37/0.25mm	4.98	43.74
SPC07080A***	12	37/0.32mm	5.94	67.36

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07081A***	26	19/0.10mm	2.17	7.60
SPC07082A***	24	19/0.12mm	2.37	9.85
SPC07083A***	22	19/0.15mm	2.73	14.52
SPC07084A***	20	19/0.20mm	3.32	22.84
SPC07085A***	18	19/0.25mm	3.83	33.25
SPC07086A***	16	19/0.30mm	4.33	42.24
SPC07087A***	14	37/0.25mm	5.41	65.07
SPC07088A***	12	37/0.32mm	6.38	99.41



Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07089A***	26	19/0.10mm	2.38	9.79
SPC07090A***	24	19/0.12mm	2.60	13.12
SPC07091A***	22	19/0.15mm	3.01	19.41
SPC07092A***	20	19/0.20mm	3.67	29.94
SPC07093A***	18	19/0.25mm	4.25	44.18
SPC07094A***	16	19/0.30mm	4.80	56.55
SPC07095A***	14	37/0.25mm	6.00	85.76
SPC07096A***	12	37/0.32mm	7.09	134.21

Cable, Type 1, Silver Plated Conductor, 150°C, with Screen and Jacket

Part Number	Size (AWG)	Single Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07099A***	26	19/0.10mm	1.72	6.54
SPC07100A***	24	19/0.12mm	1.81	7.40
SPC07101A***	22	19/0.15mm	1.98	9.66
SPC07102A***	20	19/0.20mm	2.25	13.30
SPC07103A***	18	19/0.25mm	2.49	18.92
SPC07104A***	16	19/0.30mm	2.72	21.85
SPC07105A***	14	37/0.25mm	3.19	30.18
SPC07106A***	12	37/0.32mm	3.64	42.08

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07107A***	26	19/0.10mm	2.54	10.43
SPC07108A***	24	19/0.12mm	2.72	12.53
SPC07109A***	22	19/0.15mm	3.06	16.96
SPC07110A***	20	19/0.20mm	3.60	24.09
SPC07112A***	18	19/0.25mm	4.08	32.34
SPC07113A***	16	19/0.30mm	4.54	39.12
SPC07114A***	14	37/0.25mm	5.48	55.96
SPC07115A***	12	37/0.32mm	6.44	83.55

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07116A***	26	19/0.10mm	2.67	14.16
SPC07117A***	24	19/0.12mm	2.87	16.92
SPC07118A***	22	19/0.15mm	3.23	22.56
SPC07119A***	20	19/0.20mm	3.82	32.72
SPC07120A***	18	19/0.25mm	4.33	44.56
SPC07121A***	16	19/0.30mm	4.83	54.43
SPC07122A***	14	37/0.25mm	5.91	79.79
SPC07123A***	12	37/0.32mm	6.88	118.73

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07124A***	26	19/0.10mm	2.88	17.38
SPC07125A***	24	19/0.12mm	3.10	21.15
SPC07126A***	22	19/0.15mm	3.51	28.30
SPC07127A***	20	19/0.20mm	4.17	41.54
SPC07128A***	18	19/0.25mm	4.75	56.99
SPC07129A***	16	19/0.30mm	5.30	69.99
SPC07130A***	14	37/0.25mm	6.50	103.1
SPC07131A***	12	37/0.32mm	7.59	154.41

Cable, Type 2, Tin plated conductor, 135°C, without screen or Jacket

Part Num	Size (AWG)	Single Core			
		Strand Size	Min Diameter mm	Max Diameter mm	Mass Max kg/km
SPC07132A***	26	19/0.10mm	0.82	0.92	2.10
SPC07133A***	24	19/0.12mm	0.90	1.02	2.84
SPC07134A***	22	19/0.15mm	1.09	1.17	4.10
SPC07135A***	20	19/0.20mm	1.33	1.52	6.95
SPC07136A***	18	19/0.25mm	1.55	1.68	9.80
SPC07137A***	16	19/0.30mm	1.71	1.85	12.99
SPC07138A***	14	37/0.25mm	2.03	2.28	18.77
SPC07139A***	12	37/0.32mm	2.52	2.73	28.6
SPC07140A***	10	37/0.40mm	3.15	3.61	48.80

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07141A***	26	19/0.10mm	1.90	4.71
SPC07142A***	24	19/0.12mm	2.26	6.70
SPC07143A***	22	19/0.15mm	2.52	9.23
SPC07144A***	20	19/0.20mm	3.00	14.45
SPC07145A***	18	19/0.25mm	3.48	21.29
SPC07146A***	16	19/0.30mm	3.74	26.32
SPC07147A***	14	37/0.25mm	4.88	41.67
SPC07148A***	12	37/0.32mm	5.90	63.64

Part Number	3 Core		
	Strand Size	Max Diameter	Mass Max

			mm	kg/km
SPC07149A***	26	19/0.10mm	2.05	7.07
SPC07151A***	24	19/0.12mm	2.44	10.05
SPC07152A***	22	19/0.15mm	2.72	13.85
SPC07153A***	20	19/0.20mm	3.24	21.67
SPC07154A***	18	19/0.25mm	3.76	31.93
SPC07155A***	16	19/0.30mm	4.04	39.48
SPC07156A***	14	37/0.25mm	5.27	62.51
SPC07157A***	12	37/0.32mm	6.37	95.46

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07158A***	26	19/0.10mm	2.29	9.42
SPC07159A***	24	19/0.12mm	2.72	13.40
SPC07160A***	22	19/0.15mm	3.05	18.47
SPC07161A***	20	19/0.20mm	3.63	28.90
SPC07162A***	18	19/0.25mm	4.21	42.57
SPC07163A***	16	19/0.30mm	4.53	52.64
SPC07164A***	14	37/0.25mm	5.90	83.34
SPC07165A***	12	37/0.32mm	7.14	127.29

Cable, Type 2, Tin plated conductor, 135°C, without screen, with Jacket

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07166A***	22	19/0.15mm	2.92	11.65
SPC07167A***	20	19/0.12mm	3.40	18.40
SPC07168A***	18	19/0.25mm	3.88	24.54
SPC07169A***	16	19/0.30mm	4.16	31.11
SPC07170A***	14	37/0.25mm	5.34	46.86
SPC07171A***	12	37/0.32mm	6.36	69.86
SPC07172A***	10	37/0.40mm	7.68	106.11

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07173A***	22	19/0.15mm	3.12	16.70
SPC07174A***	20	19/0.12mm	3.64	25.44
SPC07175A***	18	19/0.25mm	4.16	35.77
SPC07176A***	16	19/0.30mm	4.46	45.30
SPC07177A***	14	37/0.25mm	5.73	68.65
SPC07178A***	12	37/0.32mm	6.83	102.83
SPC07179A***	10	37/0.40mm	8.26	156.81

	4 Core
--	--------

Part Number	Size (AWG)	Strand Size	Max Diameter mm	Mass Max kg/km
SPC07180A002	22	19/0.15mm	3.45	21.74
SPC07181A002	20	19/0.12mm	4.03	33.35
SPC07182A002	18	19/0.25mm	4.61	47.01
SPC07183A002	16	19/0.30mm	4.99	59.68
SPC07184A002	14	37/0.25mm	6.36	90.44
SPC07185A002	12	37/0.32mm	7.60	135.81
SPC07186A002	10	37/0.40mm	9.20	207.50

Cable, Type 2, Tin plated conductor, 135°C, with screen, and with Jacket

Part Number	Size (AWG)	Single Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07187A002	26	19/0.10mm	1.90	7.81
SPC07188A002	24	19/0.12mm	2.06	9.51
SPC07189A002	22	19/0.15mm	2.16	10.98
SPC07190A002	20	19/0.20mm	2.40	14.44
SPC07191A002	18	19/0.25mm	2.64	18.71
SPC07192A002	16	19/0.30mm	2.77	22.12
SPC07193A002	14	37/0.25mm	3.40	32.08
SPC07194A002	12	37/0.32mm	3.91	45.28

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07195A002	26	19/0.10mm	2.90	12.90
SPC07196A002	24	19/0.12mm	3.22	16.34
SPC07197A002	22	19/0.15mm	3.42	18.68
SPC07198A002	20	19/0.20mm	3.90	25.86
SPC07199A002	18	19/0.25mm	4.38	33.78
SPC07200A002	16	19/0.30mm	4.64	41.30
SPC07201A002	14	37/0.25mm	5.84	59.53
SPC07202A002	12	37/0.32mm	6.86	84.82

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07203A002	26	19/0.10mm	3.06	17.02
SPC07204A002	24	19/0.12mm	3.41	21.42
SPC07205A002	22	19/0.15mm	3.62	24.85
SPC07206A002	20	19/0.20mm	4.14	35.12
SPC07207A002	18	19/0.25mm	4.66	46.55
SPC07208A002	16	19/0.30mm	4.94	57.35
SPC07209A002	14	37/0.25mm	6.23	83.38
SPC07210A002	12	37/0.32mm	7.33	120.41

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07211A002	26	19/0.10mm	3.32	20.96
SPC07212A002	24	19/0.12mm	3.71	26.64
SPC07213A002	22	19/0.15mm	3.95	31.04
SPC07214A002	20	19/0.20mm	4.53	44.49
SPC07215A002	18	19/0.25mm	5.11	59.43
SPC07216A002	16	19/0.30mm	5.49	73.58
SPC07217A002	14	37/0.25mm	6.86	107.41
SPC07218A002	12	37/0.32mm	8.10	156.50

Cable, Type 2, Silver Plated Conductor, 150°C, without Screen or Jacket

Part Number	Size (AWG)	Single Core			
		Strand Size	Min Diameter mm	Max Diameter mm	Mass Max kg/km
SPC07219A002	26	19/0.10mm	0.83	1.00	2.31
SPC07220A002	24	19/0.12mm	0.93	1.16	3.28
SPC07221A002	22	19/0.15mm	1.10	1.26	4.57
SPC07222A002	20	19/0.20mm	1.38	1.50	7.15
SPC07223A002	18	19/0.25mm	1.60	1.74	10.54
SPC07224A002	16	19/0.30mm	1.75	1.87	13.48
SPC07225A002	14	37/0.25mm	2.14	2.44	20.63
SPC07226A002	12	37/0.32mm	2.57	2.95	31.51
SPC07227A002	10	37/0.40mm	3.15	3.61	48.80

Part Number	Size (AWG)	Strand Size	2 Core	
			Max Diameter mm	Mass Max kg/km
SPC07228A002	26	19/0.10mm	2.00	4.69
SPC07229A002	24	19/0.12mm	2.32	6.65
SPC07230A002	22	19/0.15mm	2.52	9.23
SPC07231A002	20	19/0.20mm	3.00	14.49
SPC07232A002	18	19/0.25mm	3.48	21.29
SPC07233A002	16	19/0.30mm	3.74	27.37
SPC07234A002	14	37/0.25mm	4.88	41.67
SPC07235A002	12	37/0.32mm	5.90	63.64
SPC07236A002	10	37/0.40mm	7.22	98.57

Part Number	Size (AWG)	Strand Size	3 Core	
			Max Diameter mm	Mass Max kg/km
SPC07237A002	26	19/0.10mm	2.16	7.04
SPC07238A002	24	19/0.12mm	2.51	9.97
SPC07239A002	22	19/0.15mm	2.72	13.85
SPC07240A002	20	19/0.20mm	3.24	21.74
SPC07241A002	18	19/0.25mm	3.76	31.93
SPC07242A002	16	19/0.30mm	4.41	41.05
SPC07243A002	14	37/0.25mm	5.27	62.51

Aerosafe/55XL

General Use Cables

Datasheet: LD012342



SPC07244A002	12	37/0.32mm	6.37	95.46
SPC07245A002	10	37/0.40mm	7.80	147.86

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07247A002	26	19/0.10mm	2.42	9.39
SPC07248A002	24	19/0.12mm	2.81	13.30
SPC07249A002	22	19/0.15mm	3.05	18.47
SPC07250A002	20	19/0.20mm	3.63	28.98
SPC07251A002	18	19/0.25mm	4.21	42.57
SPC07252A002	16	19/0.30mm	4.53	54.74
SPC07253A002	14	37/0.25mm	5.90	83.34
SPC07254A002	12	37/0.32mm	7.14	127.29
SPC07255A002	10	37/0.40mm	8.74	197.14

Cable, Type 2, Silver Plated Conductor, 150°C, without Screen with Jacket

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07256A002	26	19/0.10mm	2.40	7.02
SPC07257A002	24	19/0.12mm	2.75	9.43
SPC07258A002	22	19/0.15mm	2.95	12.05
SPC07259A002	20	19/0.20mm	3.42	18.21
SPC07260A002	18	19/0.25mm	3.96	25.52
SPC07261A002	16	19/0.30mm	4.23	32.35
SPC07262A002	14	37/0.25mm	5.34	46.86
SPC07263A002	12	37/0.32mm	6.36	70.07
SPC07264A002	10	37/0.40mm	7.68	106.11

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07265A002	26	19/0.10mm	2.56	9.82
SPC07266A002	24	19/0.12mm	2.94	13.31
SPC07267A002	22	19/0.15mm	3.15	17.16
SPC07268A002	20	19/0.20mm	3.66	26.22
SPC07269A002	18	19/0.25mm	4.24	36.96
SPC07270A002	16	19/0.30mm	4.54	47.10
SPC07271A002	14	37/0.25mm	5.73	68.65
SPC07272A002	12	37/0.32mm	6.83	102.88
SPC07273A002	10	37/0.40mm	8.26	156.81

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07274A002	26	19/0.10mm	2.82	12.65
SPC07275A002	24	19/0.12mm	3.24	17.28
SPC07276A002	22	19/0.15mm	3.48	22.38
SPC07277A002	20	19/0.20mm	4.04	34.37
SPC07278A002	18	19/0.25mm	4.69	48.59
SPC07281A002	16	19/0.30mm	5.02	62.05

SPC07282A002	14	37/0.25mm	6.36	90.44
SPC07283A002	12	37/0.32mm	7.60	136.09
SPC07284A002	10	37/0.40mm	9.20	207.50

Cable, Type 2, Silver Plated Conductor, 150°C, with Screen and Jacket

Part Number	Size (AWG)	Single Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07285A002	26	19/0.10mm	1.90	7.81
SPC07286A002	24	19/0.12mm	2.06	9.51
SPC07287A002	22	19/0.15mm	2.16	10.98
SPC07288A002	20	19/0.20mm	2.40	14.66
SPC07288A002	18	19/0.25mm	2.65	19.00
SPC07290A002	16	19/0.30mm	2.79	22.74
SPC07291A002	14	37/0.25mm	3.40	32.08
SPC07292A002	12	37/0.32mm	3.91	45.28

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07293A002	26	19/0.10mm	2.90	13.15
SPC07294A002	24	19/0.12mm	3.22	16.34
SPC07295A002	22	19/0.15mm	3.42	19.42
SPC07296A002	20	19/0.20mm	3.90	26.65
SPC07297A002	18	19/0.25mm	4.42	35.19
SPC07298A002	16	19/0.30mm	4.69	42.65
SPC07299A002	14	37/0.25mm	5.84	59.53
SPC07300A002	12	37/0.32mm	6.86	84.82

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC072301A002	26	19/0.10mm	3.06	17.02
SPC072302A002	24	19/0.12mm	3.41	21.42
SPC072303A002	22	19/0.15mm	3.62	25.85
SPC072304A002	20	19/0.20mm	4.14	36.18
SPC072305A002	18	19/0.25mm	4.70	48.40
SPC072306A002	16	19/0.30mm	5.00	59.28
SPC072307A002	14	37/0.25mm	6.23	83.38
SPC072308A002	12	37/0.32mm	7.33	120.41

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC072309A002	26	19/0.10mm	3.32	20.96
SPC072310A002	24	19/0.12mm	3.71	26.64
SPC072311A002	22	19/0.15mm	3.95	32.37
SPC072312A002	20	19/0.20mm	4.53	45.82
SPC072313A002	18	19/0.25mm	5.15	61.78
SPC072314A002	16	19/0.30mm	5.49	76.10
SPC072315A002	14	37/0.25mm	6.86	107.41
SPC072316A002	12	37/0.32mm	8.10	156.50

Cable, Type 2, Nickel Plated Conductor, 150°C, without Screen or Jacket

Part Number	Size (AWG)	Single Core			
		Strand Size	Min Diameter mm	Max Diameter mm	Mass Max kg/km
SPC072317A002	26	19/0.10mm	0.83	1.07	2.52
SPC072318A002	24	19/0.12mm	0.93	1.19	3.41
SPC072319A002	22	19/0.15mm	1.10	1.37	4.90
SPC072320A002	20	19/0.20mm	1.38	1.58	7.27
SPC072321A002	18	19/0.25mm	1.60	1.85	10.80
SPC072322A002	16	19/0.30mm	1.75	2.13	15.70
SPC072323A002	14	37/0.25mm	2.14	2.44	20.63
SPC072324A002	12	37/0.32mm	2.57	2.95	31.51
SPC072325A002	10	37/0.40mm	3.15	3.61	49.00

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07301A002	26	19/0.10mm	2.13	5.06
SPC07302A002	24	19/0.12mm	2.38	6.85
SPC07303A002	22	19/0.15mm	2.74	9.97
SPC07304A002	20	19/0.20mm	3.15	14.73
SPC07305A002	18	19/0.25mm	3.71	21.88
SPC07306A002	16	19/0.30mm	4.26	30.97
SPC07307A002	14	37/0.25mm	5.03	42.27
SPC07308A002	12	37/0.32mm	5.90	63.64
SPC07309A002	10	37/0.40mm	7.22	98.57

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07310A002	26	19/0.10mm	2.31	7.74
SPC07311A002	24	19/0.12mm	2.59	10.41
SPC07312A002	22	19/0.15mm	2.97	14.88
SPC07313A002	20	19/0.20mm	3.40	22.02
SPC07314A002	18	19/0.25mm	4.01	32.89
SPC07315A002	16	19/0.30mm	4.50	46.45
SPC07316A002	14	37/0.25mm	5.44	63.55
SPC07317A002	12	37/0.32mm	6.37	95.46
SPC07318A002	10	37/0.40mm	7.80	147.82

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07319A002	26	19/0.10mm	2.95	10.27
SPC07320A002	24	19/0.12mm	3.28	13.84
SPC07321A002	22	19/0.15mm	3.79	19.94
SPC07322A002	20	19/0.20mm	4.34	29.47
SPC07323A002	18	19/0.25mm	5.10	44.05
SPC07324A002	16	19/0.30mm	5.74	55.36
SPC07325A002	14	37/0.25mm	6.91	84.98

SPC07326A002	12	37/0.32mm	8.10	127.29
SPC07327A002	10	37/0.40mm	9.93	199.40

Cable, Type 2, Nickel Plated Conductor, 150°C, without Screen with Jacket

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07328A002	26	19/0.10mm	2.40	7.10
SPC07329A002	24	19/0.12mm	2.72	8.87
SPC07340A002	22	19/0.15mm	2.92	11.65
SPC07341A002	20	19/0.20mm	3.40	17.89
SPC07342A002	18	19/0.25mm	3.89	24.76
SPC07343A002	16	19/0.30mm	4.55	36.33
SPC07344A002	14	37/0.25mm	5.34	46.86
SPC07345A002	12	37/0.32mm	6.36	70.07
SPC07346A002	10	37/0.40mm	7.68	107.62

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07347A002	26	19/0.10mm	2.56	9.95
SPC07348A002	24	19/0.12mm	2.91	12.53
SPC07349A002	22	19/0.15mm	3.12	16.70
SPC07350A002	20	19/0.20mm	3.64	25.76
SPC07351A002	18	19/0.25mm	4.17	35.86
SPC07352A002	16	19/0.30mm	4.88	52.99
SPC07353A002	14	37/0.25mm	5.73	68.65
SPC07354A002	12	37/0.32mm	6.83	102.88
SPC07355A002	10	37/0.40mm	8.26	158.55

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07356A002	26	19/0.10mm	2.82	12.83
SPC07357A002	24	19/0.12mm	3.21	16.28
SPC07358A002	22	19/0.15mm	3.45	21.74
SPC07359A002	20	19/0.20mm	4.03	33.78
SPC07360A002	18	19/0.25mm	4.61	47.13
SPC07361A002	16	19/0.30mm	5.40	69.87
SPC07362A002	14	37/0.25mm	6.36	90.44
SPC07363A002	12	37/0.32mm	7.60	136.09
SPC07364A002	10	37/0.40mm	9.20	210.03

Cable, Type 2, Nickel Plated Conductor, 150°C, with Screen and Jacket

Part Number	Size (AWG)	Single Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07365A002	26	19/0.10mm	1.98	7.89
SPC07366A002	24	19/0.12mm	2.11	9.38
SPC07367A002	22	19/0.15mm	2.26	11.76
SPC07368A002	20	19/0.20mm	2.46	14.88
SPC07369A002	18	19/0.25mm	2.77	19.79
SPC07370A002	16	19/0.30mm	2.97	23.81
SPC07371A002	14	37/0.25mm	3.40	33.04
SPC07372A002	12	37/0.32mm	3.83	45.09

Part Number	Size (AWG)	2 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07373A002	26	19/0.10mm	3.02	12.95
SPC07374A002	24	19/0.12mm	3.28	16.37
SPC07375A002	22	19/0.15mm	3.58	20.69
SPC07376A002	20	19/0.20mm	4.01	27.09
SPC07377A002	18	19/0.25mm	4.57	36.46
SPC07378A002	16	19/0.30mm	4.98	42.86
SPC07379A002	14	37/0.25mm	5.92	61.61
SPC07380A002	12	37/0.32mm	6.83	85.43

Part Number	Size (AWG)	3 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07381A002	26	19/0.10mm	3.17	16.82
SPC07382A002	24	19/0.20mm	3.45	21.43
SPC07383A002	22	19/0.15mm	3.78	27.53
SPC07384A002	20	19/0.20mm	4.24	36.76
SPC07385A002	18	19/0.25mm	4.85	49.11
SPC07386A002	16	19/0.30mm	5.31	59.83
SPC07387A002	14	37/0.25mm	6.30	85.72
SPC07388A002	12	37/0.32mm	7.29	121.00

Part Number	Size (AWG)	4 Core		
		Strand Size	Max Diameter mm	Mass Max kg/km
SPC07389A002	26	19/0.10mm	3.50	20.98
SPC07390A002	24	19/0.12mm	3.79	26.19
SPC07391A002	22	19/0.15mm	4.17	34.53
SPC07392A002	20	19/0.20mm	4.67	45.84
SPC07393A002	18	19/0.25mm	5.36	63.25
SPC07394A002	16	19/0.30mm	5.92	76.94
SPC07395A002	14	37/0.25mm	7.01	111.46
SPC07396A002	12	37/0.32mm	8.15	159.24