






B5 AC & DC LINEAR SOLENOID

Availability
 AC or DC Standard Stroke
 PULL - THRUST - PULL & THRUST
 DC Long Stroke - PULL

Solenoid shown in energised position



Weight complete 566g
 Plunger weight 85g max

Forces shown are at Working temperature

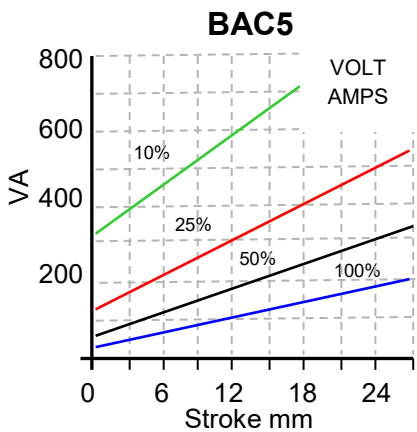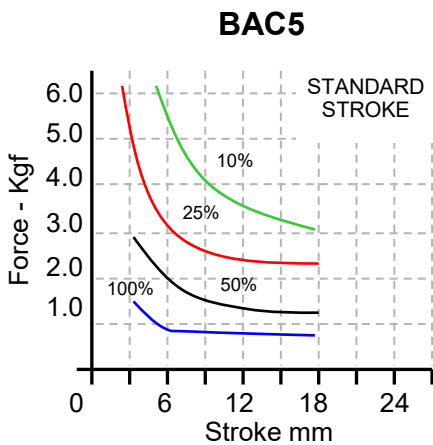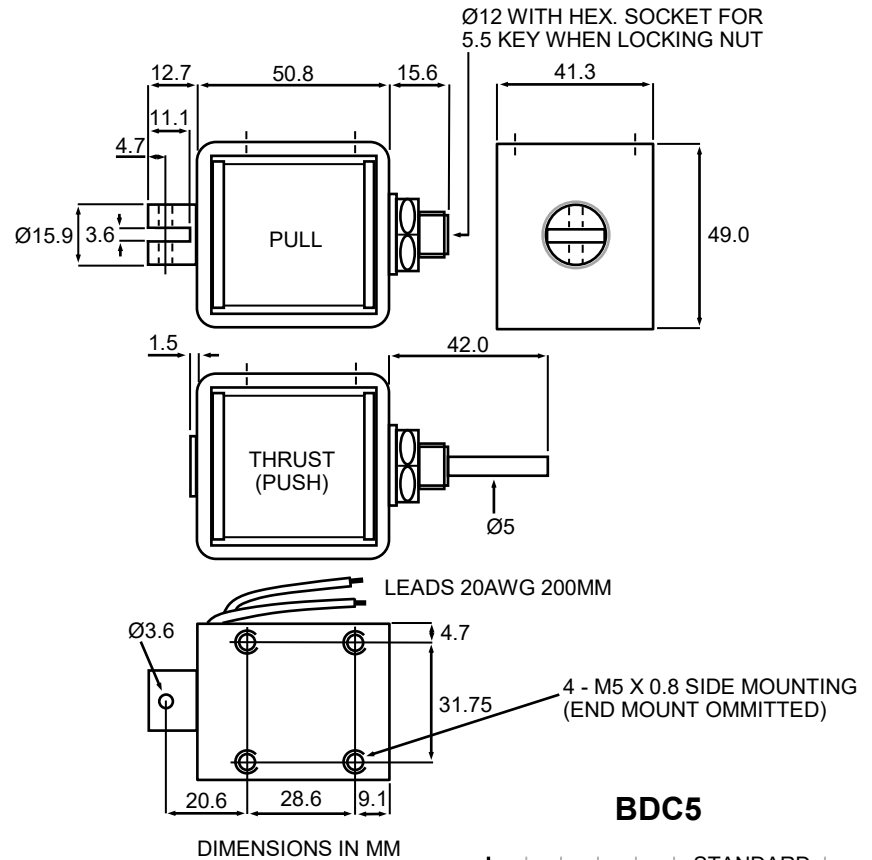

AC Closed VA
 100% Rtg = 30VA
 50% Rtg = 70VA
 25% Rtg = 120VA
 10% Rtg = 300VA



DC Watts
 100% Rtg = 15W
 50% Rtg = 30W
 25% Rtg = 60W
 10% Rtg = 150W

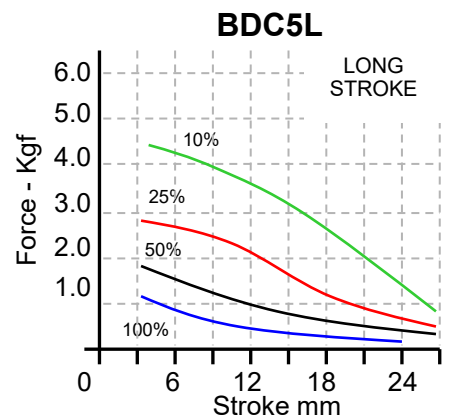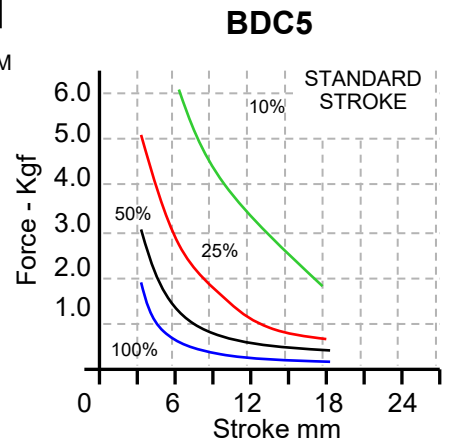

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
 We reserve the right to alter or amend designs without prior notice.

CODING

Please use the standard coding below when advising your design requirement.

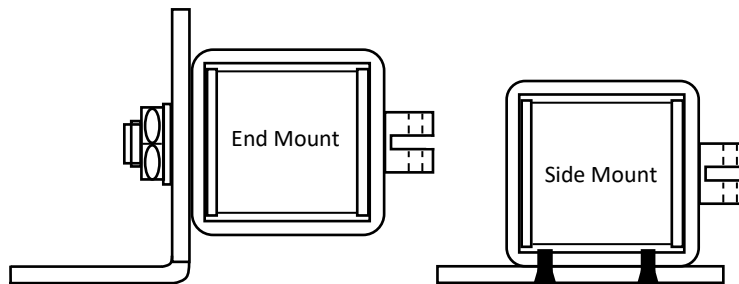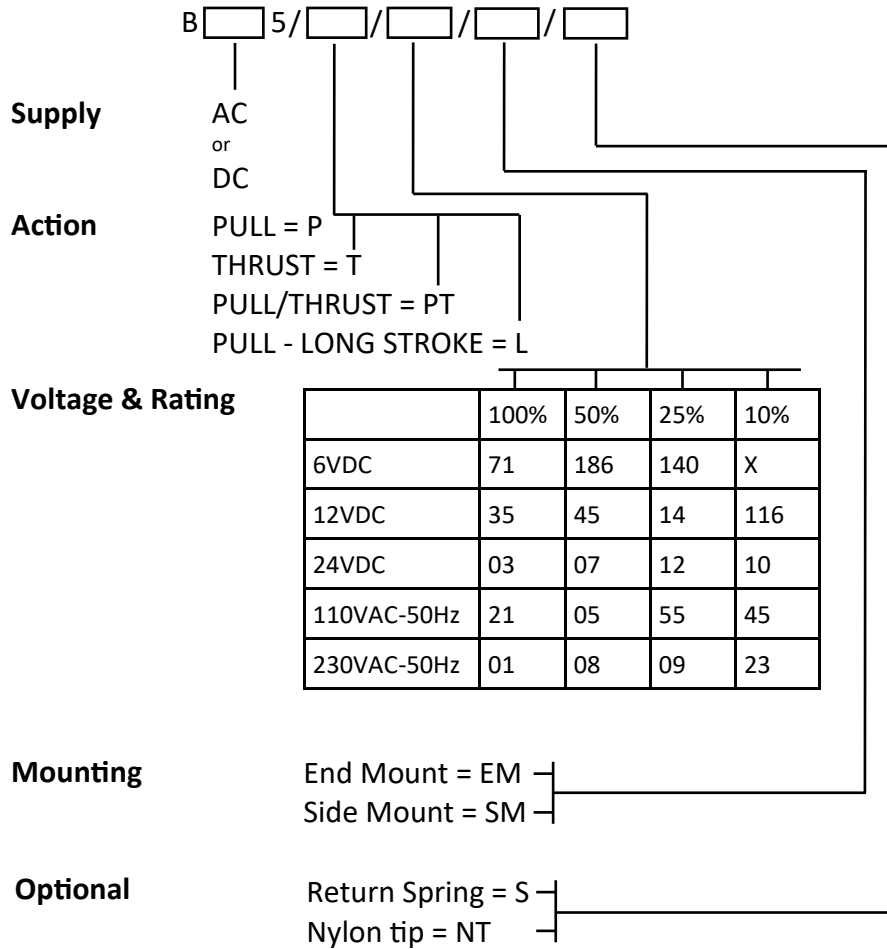

Example - BDC5 / P / 03 / SM / S

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should your require spade connectors please contact our sales team.

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk